

Telehandler

MVT6008




8m Working height
6000kg Load capacity

MAVERICK

7200 White
St. Fort Worth TX 76135
United States

+1 786.340.6550
www.maverickmth.com

Load Chart

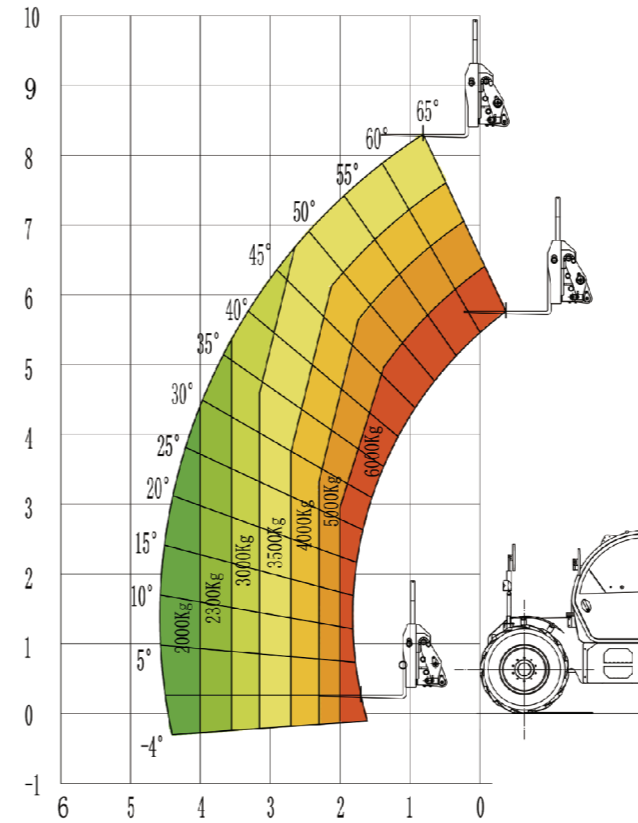

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirements of different functions.



Machine Parameters

System	Measurements	Metric
	Max. Lift Capacity	6000kg
	Max. Lift Height	8300mm
	Max. Outreach at Max Height	770mm
	Max. Working Distance	4500mm
Machine Parameters	Weight	11700kg
	Ground Clearance	430mm
	Min. Turning radius	4200mm
	Driving Speed	35km/h
Power System	Gradeability	50%
	Power Source	Cummins QSF 3.8
	Emissionstander	Euro V
	Rated power	90kW/ (100kW)
Driving System	Max. Torque	500/1500Nm/rpm (550/1500Nm/rpm)
	Driving mode	Hydrostatic Drive
	Driving	4x4
	Steering Mode	2ws,Crab Steer,4ws
Tank Capacity	Tires	15.5-25-20PR-TL
	Fuel Tank Capacity	150L
	Hydraulic Oil Capacity	180L