

## Telehandler

# MVT25.6

# MVT5519

## 6 m

Lift height

## 2,500 kg

Load capacity



# MAVERICK


MATERIAL HANDLING

[www.maverickmth.com](http://www.maverickmth.com)

[sales@maverick-americas.com](mailto:sales@maverick-americas.com)

310 Edgewood Lane,  
Cleburne, Texas 76031 - USA

## Load Chart

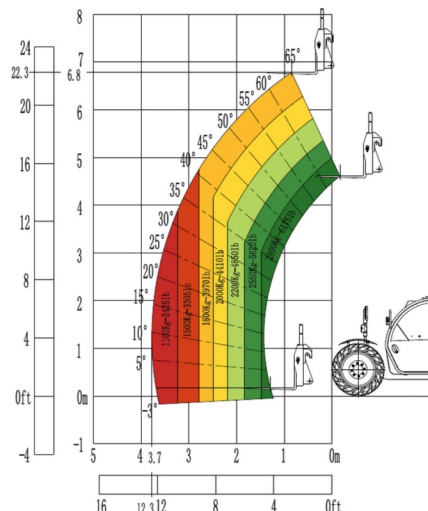

## Machine Parameters

| System               | Measurements             | Metric                | Imperial              |
|----------------------|--------------------------|-----------------------|-----------------------|
| Machine Parameters   | Max. Lift Capacity       | 2,500 kg              | 5,510 lb              |
|                      | Max. Lift Height         | 5,850 mm              | 19.20 ft              |
|                      | Length (with fork)       | 3,965 / 5,145 mm      | 13.0 / 16.90 ft       |
|                      | Width                    | 1,850 mm              | 6.05 ft               |
|                      | Height                   | 1,920 mm              | 6.3 ft                |
|                      | Reach at Max Height      | 650 mm                | 2.15 ft               |
|                      | Max. Forward Reach       | 3,380 mm              | 11.1 ft               |
|                      | Operational Weight       | 4,825 kg              | 10,640 lb             |
|                      | Ground Clearance         | 300 mm                | 1 ft                  |
|                      | Turning Radius (outside) | 3,350 mm              | 11 ft                 |
| Power / Drive System | Drive Speed              | 30 km/h               | 18.65 mph             |
|                      | Gradeability (laden)     | 50%                   | 50%                   |
|                      | Engine                   | Cummins               | Cummins               |
|                      | Axles                    | Carraro               | Carraro               |
|                      | Hydraulic System         | Husco Hydrostatic     | Husco Hydrostatic     |
|                      | Transmission Mode        | Hydrostatic Drive     | Hydrostatic Drive     |
|                      | Driving                  | 4x4                   | 4x4                   |
|                      | Steering Mode            | 2WS, Crab Steer, 4WS  | 2WS, Crab Steer, 4WS  |
|                      | Cab Options              | Closed Cab / Open Cab | Closed Cab / Open Cab |
|                      | Tires                    | 12-16.5               | 12-16.5               |

# MAVERICK



## Various interchangeable attachments

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.



Pallet Forks



Bucket



Grapple



Work Platform



Bale Spear