

MVT4517 / MVT1056

4,500 kg / 9,920 lb Telehandler

High-reach material handling platform with quick-change attachment system

55.5 ft

Maximum lift height

16.9 m




System	Specification	Imperial	Metric
Machine	Max. Lift Capacity	9,920 lb	4,500 kg
Machine	Max. Lift Height	55.5 ft	16,900 mm
Machine	Length with / without forks	25.31 / 20.72 ft	7,715 / 6,315 mm
Machine	Width	8.07 ft	2,460 mm
Machine	Height	8.53 ft	2,600 mm
Machine	Reach at Max. Height	5.41 ft	1,650 mm
Machine	Max. Forward Reach	41.5 ft	12,650 mm
Machine	Operating Weight	31,250 lb	14,175 kg
Machine	Ground Clearance	1.41 ft	430 mm
Machine	Outside Turning Radius	13.78 ft	4,200 mm
Machine	Drive Speed	21.75 mph	35 km/h
Power	Engine	Cummins F 3.8	Cummins F 3.8
Power	Rated Power	121 hp	90 kW
Power	Max. Torque	369 lb-ft @ 1,500 rpm	500 Nm @ 1,500 rpm
Drive	Transmission	Hydrostatic Drive	Hydrostatic Drive
Drive	Driving / Steering	4x4 / 2WS, Crab, 4WS	4x4 / 2WS, Crab, 4WS
Tanks	Fuel / Hydraulic	33 gal / 39.59 gal	150 L / 180 L


LOAD CHARTS

Original load chart graphics preserved and enlarged for clear viewing. Values shown in lb/kg and ft/m as provided in the source chart.

OUTRIGGER UP

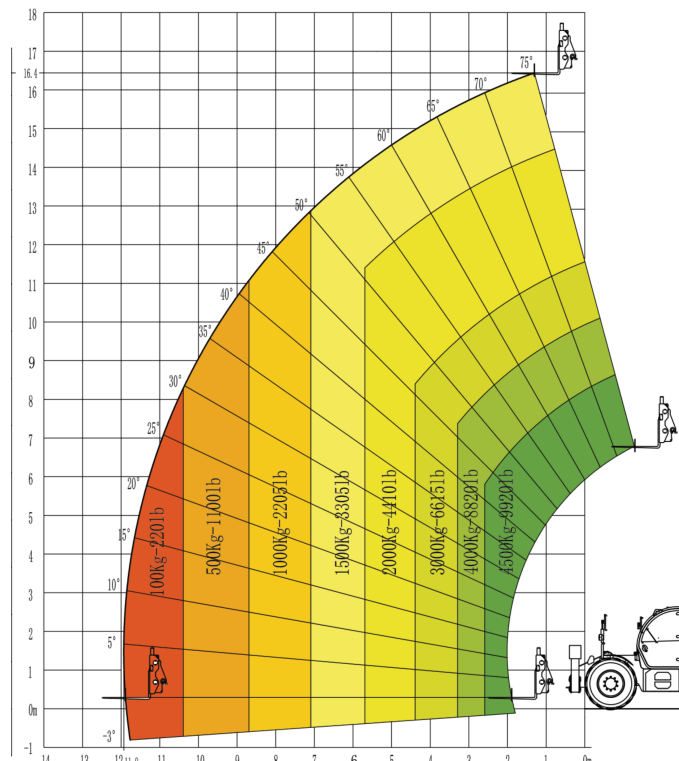



OUTRIGGER DOWN

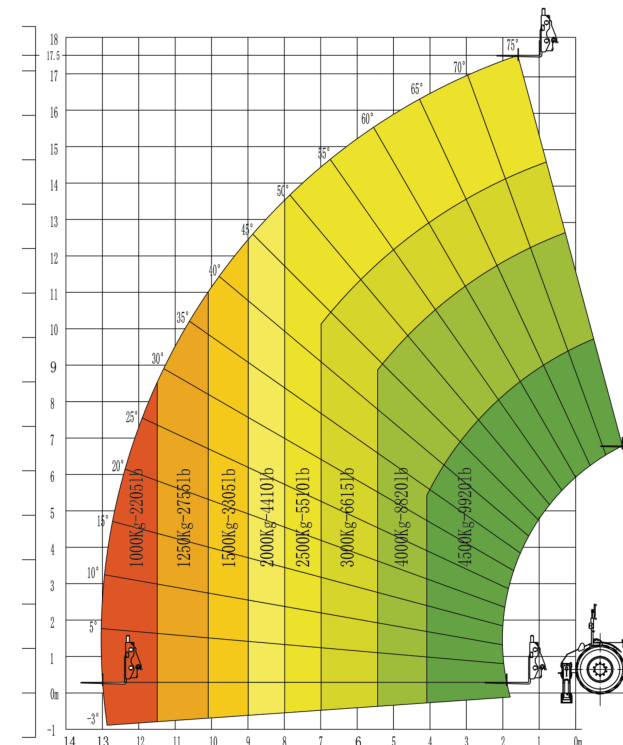

Always confirm capacity, attachment, outrigger position and site conditions before lifting. Refer to the operator manual and machine rating plate for final operating limits.

QUICK-CHANGE ATTACHMENT SYSTEM

Configured to support fast attachment changeover for multiple jobsite applications.

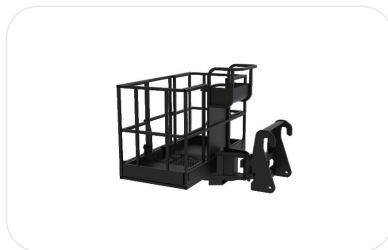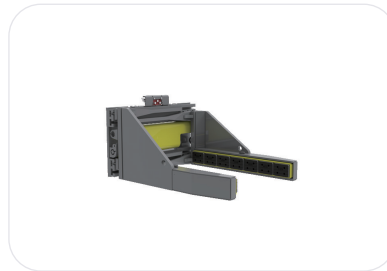

Professional application coverage

- **Fork carriage**
General material handling and palletized loads
- **Bucket**
Bulk materials and site cleanup
- **Hook / jib**
Suspended loads within rated chart limits
- **Work platform**
Elevated access where permitted by local regulations
- **Quick coupler**
Fast changes between attachments to improve utilization

Maverick Material Handling

www.maverickmth.com | sales@maverick-americas.com | +1 903 546 9642