Telehandler

MVT9.24
MVT4207

Working height **Load capacity**

23.5ft - 9480lbs

7.15m - 4300kg

MAVERICK
310 Edgewood Lane Cleburne Texas 76031

+1 786.340.6550
www.maverickmth.com

Load Chart

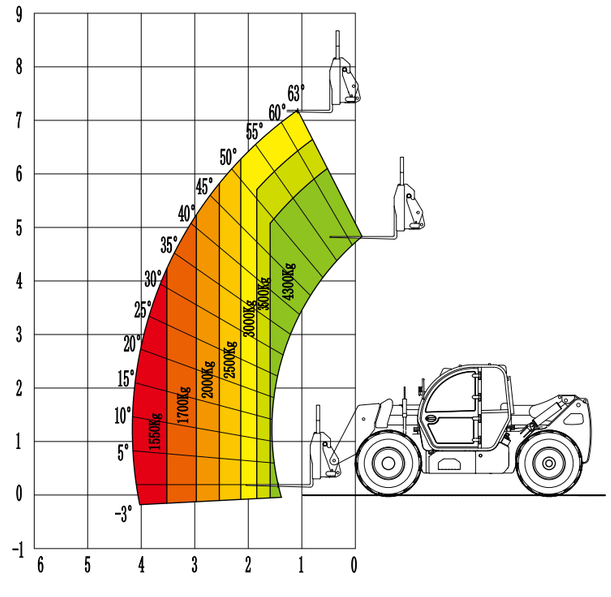

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	9480lb	4,300kg
	Max. Lift Height	23.5ft	7,150mm
	Length(/with fork)	16.40/20.97ft	5,000/6,390mm
	Width	7.55ft	2,300mm
	Height	8.25ft	2,515mm
	Reach at Max Height	3.12ft	950mm
	Max. Forward Reach	13.37ft	4,075mm
	Operational Weight	20006.9lb	9,070kg
	Ground Clearance	1.31ft	400mm
	Turning radius(outside)	12.47ft	3,800mm
	Drive Speed	24.85mph	40km/h
	Gradeability(laden)	55%	
Power System	Power Source	Cummins F 3.8	
	Emission Norm	Euro V	
	Rated power	121hp	90kW
	Max. Torque	369lb.ft/1,500rpm	500Nm/1,500rpm
Transmission System	Transmission mode	Hydrostatic Drive	
	Driving	4x4	
	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	400/80R24	
Tank Capacity	Fuel Tank Capacity	26.4gal	120L
	Hydraulic Tank Capacity	33gal	150L

Application & Configuration

- Engineered for farm operations with better maneuverability.

Various replaceable attachment

- Installation of attachment adopts quick change mode,which can quickly switch attachments to achieve the operation requirement of different functions.